


**RIBATTINI SEMIFORATI
STANDARD**

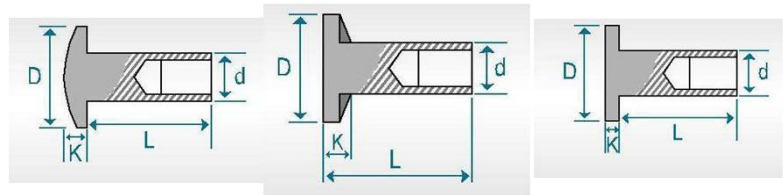

d +0,00 -0,10 diametro	L +0,30 -0,00 Lunghezza	D +0,20 -0,20 testa bombata	D +0,20 -0,20 testa piana svasata	D +0,20 -0,20 testa cilindrica
		DIN 6791	DIN 6792	DIN 7338 B
2	3 ÷ 40	4	4	3,5
3	4 ÷ 60	6	6	5,5
4	6 ÷ 100	8	8	7,5
5	6 ÷ 100	10	10	9,5
6	6 ÷ 100	12	12	11,5
8	6 ÷ 100	16	16	15,5
10	6 ÷ 100	20	20	18
12	6 ÷ 70	22	18	20

Materiali: ferro, ottone, rame, alluminio e leghe, inox